



CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.


SPECIFICATIONS

Current Rating: 3.0 Amp
 Insulator Resistance:
 5000 Megohms min.
 Contact Resistance:
 20 m ohms max.
 Dielectric withstanding:
 AC 1000V/minute
 Operating Temperature:
 -40°C to +105°C
 Contact Material: Brass
 Insulator Material:
 PBT UL94V-0
 Color: Black
 Finish:
 Standard: Gold flash all over



Cir- cuits	Dimension (mm)		
	L1	L2	L3
2x3	5.08	15.24	12.84
2x4	7.62	17.78	15.38
2x5	10.16	20.32	17.92
2x6	12.70	22.86	20.46
2x7	15.24	25.40	23.00
2x8	17.78	27.94	25.54
2x9	20.32	30.48	28.08
2x10	22.86	33.02	30.62
2x11	25.40	35.56	33.16
2x12	27.94	38.10	35.70
2x13	30.48	40.64	38.24
2x14	33.02	43.18	40.78
2x15	35.56	45.72	43.32
2x16	38.10	48.26	45.86
2x17	40.64	50.80	48.40
2x18	43.18	53.34	50.94
2x19	45.72	55.88	53.48
2x20	48.26	58.42	56.02
2x21	50.80	60.96	58.56
2x22	53.34	63.50	61.10
2x23	55.88	66.04	63.64
2x24	58.42	68.58	66.18
2x25	60.96	71.12	68.72
2x26	63.50	73.66	71.26
2x27	66.04	76.20	73.80
2x28	68.58	78.74	76.34
2x29	71.12	81.28	78.88
2x30	73.66	83.82	81.42
2x32	78.74	88.90	86.50

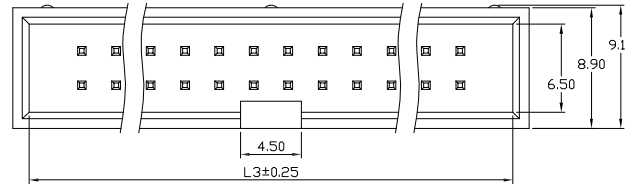

RECOMMENDED P.C.B LAYOUT

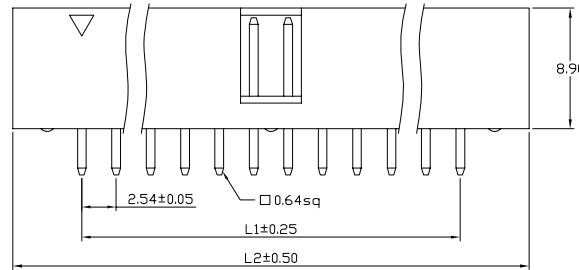

06-58 Pin

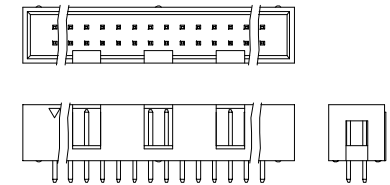

60/64 Pin

RoHS Compliance

Ordering information:

BH P B-26 V 64 2 XX-01 G-890
 P: PBT
 Color: Black
 Pitch 2.54mm
 Straight Type
 Square Pin
 Row of Pin
 Number of Contact
 Plastic High 890:8.9mm
 G: Gold Plated
 T: Tin Plated
 H: Duplex Plated
 Contact Plating
 01 G/F
 03 3u"
 : :

UNLESS OTHERWISE
 SPECIFIED SURFACE
 FINISH ALL OVER
 TOLERANCES mm

METRIC

.X = ±0.38
 .XX = ±0.25

DRAW:

Chubby

DATE:

01/10/07

CHECK:


KEVIN

APPROVE:

TONY

TITLE: 2.54mm Box Header Straight Type
Plastic High 8.9mm

MODEL CODE: BHNB-26V642XX-01G-890



誠州電子有限公司
Sincere State Electronics Co.,Ltd.

NO	DESCRIPTION	QTY
----	-------------	-----