

CUST. MODEL:	REF.
CUST. P/N	DWG FILE:



DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

### SPFCIFICATIONS



- Current Rating: 3.0 Amp
- Insulator Resistance: 5000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric withstanding: AC 1000V/minute
- Operating Temperature: -40°C to +105°C
- Contact Material: Brass
- Insulator Material: High Temperature Thermoplastic +Glass Fibre UL94V-0
- Color: Black
- Finish: Gold, Tin or Duplex plated  
Standard: Gold flash all over  
Duplex plating: Gold plated on contact area  
Tin on solder area

**RoHS Compliance**

Cir- cuits	Dimension (mm)	
	L1	L2
2x3	5.08	15.24
2x4	7.62	17.78
2x5	10.16	20.32
2x6	12.70	22.86
2x7	15.24	25.40
2x8	17.78	27.94
2x10	22.86	33.02
2x12	27.94	38.10
2x13	30.48	40.64
2x15	35.56	45.72
2x17	40.64	50.80
2x20	48.26	58.42
2x25	60.96	71.12
2x30	73.66	83.82
2x32	78.74	88.90

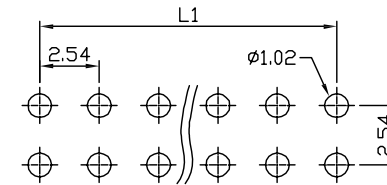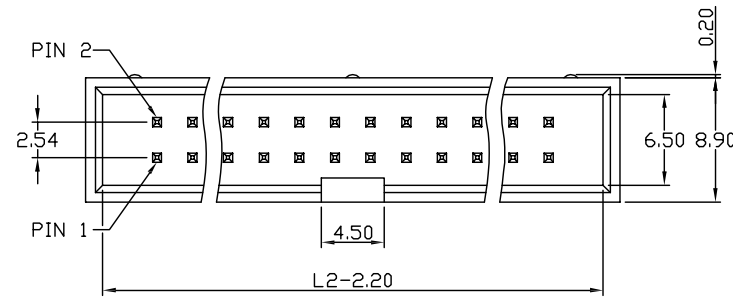

RECOMMENDED P.C.B LAYOUT

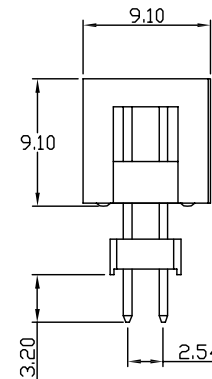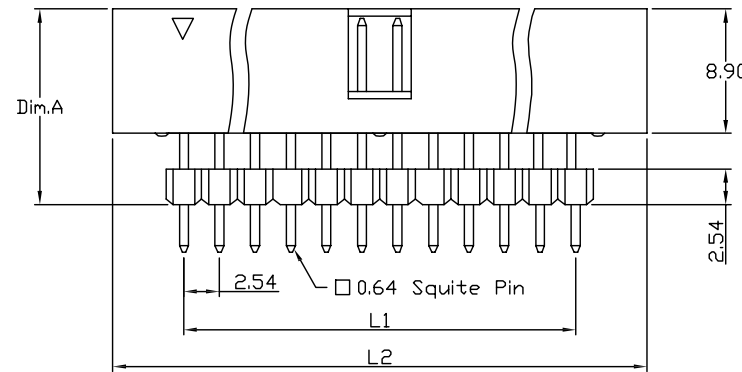

BH N B-26 V XX 6 XX-01G-XX 0

- N: Nylon-6T
- Color
- Pitch 2.54
- Straight Type
- Square Pin
- 2 Row 2 Layer
- Number of Contact
- 0: Without Post
- Dim.A
- G: Gold Plated
- T: Tin Plated
- H: Duplex Plated
- Contact Plating
- 01 Normal
- 03 3u"
- ...

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm

METRIC

.X = ±0.38

.XX = ±0.25

DRAW: CHUBBY


DATE: 01/10/07

CHECK: KEVIN

APPROVE: TONY

TITLE: 2.54 Box Header Straight Type Plastic High XX

MODEL CODE: BHNB-26V646XX-01G-XX0



誠州電子有限公司  
Sincere State Electronics Co.,Ltd.

NO	DESCRIPTION	QTY