



CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.



SPFCIFICATIONS

- Current Rating: 3.0 Amp
- Insulator Resistance: 5000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric withstanding: AC 1000V/minute
- Operating Temperature: -40°C to +105°C
- Contact Material: Brass
- Insulator Material: PBT UL94V-0
- Color: Black
- Finish: Gold, Tin or Duplex plated
- Standard: Gold flash all over
- Duplex plating: Gold plated on contact area
- Tin on solder area

RoHS Compliance

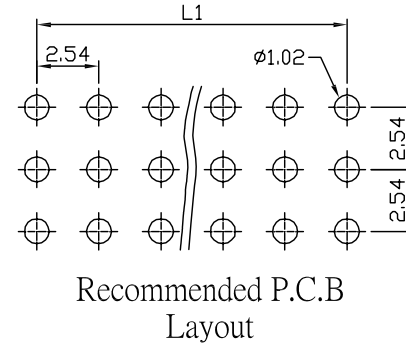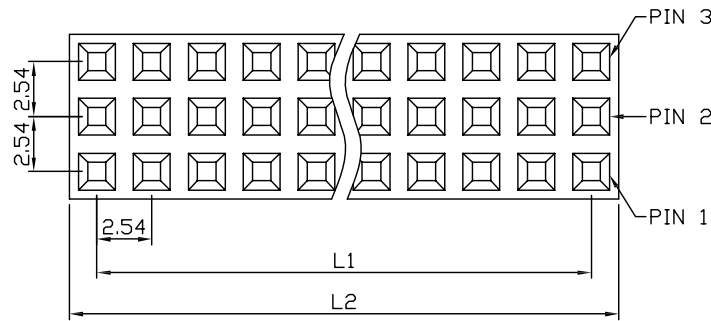



Cir-cuits	Dimension (mm)	
	L1	L2
3x3	5.08	8.12
3x4	7.62	10.66
3x5	10.16	13.20
3x6	12.70	15.74
3x7	15.24	18.28
3x8	17.78	20.82
3x9	20.32	23.36
3x10	22.86	25.90
3x11	25.40	28.44
3x12	27.94	30.98
3x13	30.48	33.52
3x14	33.02	36.06
3x15	35.56	38.60
3x16	38.10	41.14
3x17	40.64	43.68
3x18	43.18	46.22
3x19	45.72	48.76
3x20	48.26	51.30
3x21	50.80	53.84
3x22	53.34	56.38
3x23	55.88	58.92
3x24	58.42	61.46
3x25	60.96	64.00
3x26	63.50	66.54
3x27	66.04	69.08
3x28	68.58	71.62
3x29	71.12	74.16
3x30	73.66	76.70
3x31	76.20	79.24
3x32	78.74	81.78

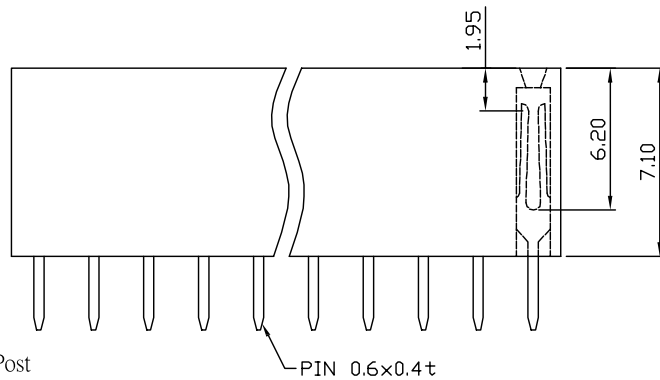

Three Two Contact Terminal

FH N B-26 V X 3 XX-01G-71 0

- N: Nylon
- Color
- Pitch 2.54
- Straight Type
- Terminal Type
- Row of Pin
- Number of Contact
- 0: Without Post
- Plastic High 71:7.1
- G: Gold Plated
- T: Tin Plated
- H: Duplex Plated
- Contact Plating
- 01 Normal
- 03 3u"
- : :

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm	DRAW:	DATE:	TITLE: 2.54 Female Header Straight Type Plastic High 7.1
	CHUBBY	01/10/07	
	CHECK:	APPROVE:	MODEL CODE: FHNB-26VY3XX-01G-710
METRIC	KEVIN	TONY	 誠州電子有限公司 <i>Sincere State Electronics Co.,Ltd.</i>
.X = ±0.38 .XX = ±0.25			

NO	DESCRIPTION	QTY