

CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

### SPFCIFICATIONS

Current Rating:

1.0 Amp

Insulator Resistance:

1000 Megohms min.

Contact Resistance:

25 m ohms max.

Dielectric withstanding:

AC 500V/minute

Operating Temperature:

-40°C to +105°C

Contact Material:

Brass

Insulator Material:

High Temperature Thermoplastic

+Glass Fibre UL94V-0

Color: Black

Finish:

Gold, Tin or Duplex plated

Standard: Gold flash all over



Duplex plating:

Gold plated on contact area



Tin on solder area

**RoHS Compliance**

Cir-cuits	Dimension (mm)	
	L1	L2
2x3	4.00	13.20
2x4	6.00	15.20
2x5	8.00	17.20
2x6	10.00	19.20
2x7	12.00	21.20
2x8	14.00	23.20
2x10	18.00	27.20
2x12	22.00	31.20
2x13	24.00	33.20
2x15	28.00	37.20
2x17	32.00	41.20
2x20	38.00	47.20
2x22	42.00	51.20
2x25	48.00	57.20
2x34	66.00	75.20

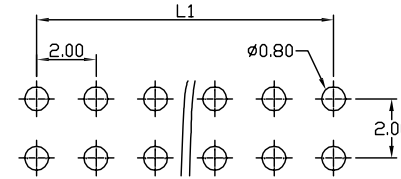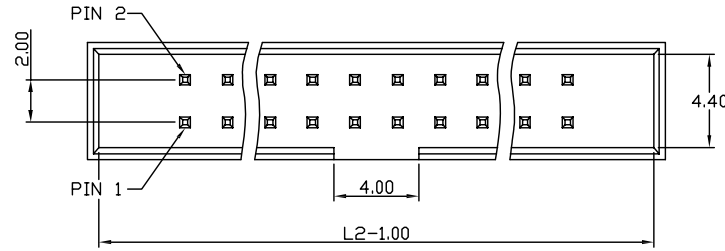


RECOMMENDED P.C.B LAYOUT

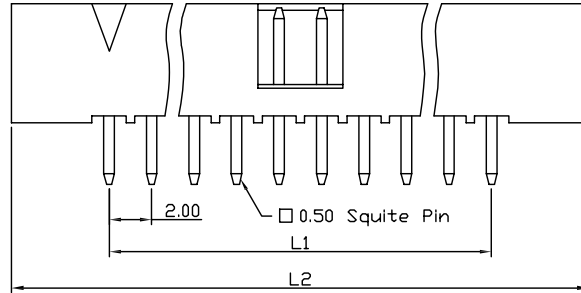

BH N B-20 V XX 2 XX-01G-56 0

- N: Nylon-6T
- Color
- Pitch 2.0
- Straight Type
- Square Pin
- Row of Pin
- Number of Contact
- 0: Without Post
- Plastic High 56:5.6
- G: Gold Plated
- T: Tin Plated
- H: Duplex Plated
- Contact Plating
- 01 Normal
- 03 3u"
- : :

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm  METRIC  .X = ±0.38 .XX = ±0.25	DRAW:	DATE:	<b>TITLE:</b> 2.0 2x22P Box Header Straight Type Plastic High 5.6  <b>MODEL CODE:</b> BHNB-20V05244-01G-560
	CHUBBY	01/10/07	
	CHECK:	APPROVE:	 <b>誠州電子有限公司</b> <i>Sincere State Electronics Co.,Ltd.</i>
KEVIN	TONY		

NO	DESCRIPTION	QTY
----	-------------	-----